


## Specifically Designed For The 42" x 16" Market and Replacement for the Suburban Dynaline

Islandaire EZ Series GS is a replacement for the Suburban Dynaline units. Our commercial duty construction with heavy gauge galvanized steel and superior components create an efficient reliable unit. This design eliminates the need for any interior or exterior renovation. Use of the existing wall sleeve-cabinet and louver saves time and money, two very important factors in today's competitive environment! If the need does occur where the duct kit sub-base/skirt, wall sleeve-cabinet and/or louver needs to be replaced, we manufacture these accessories as well. This unit is also used extensively for new construction projects.

**\* Our stainless steel, tubular heat exchanger has a lifetime warranty!**

### FEATURES

- Proudly Made in the U.S.A.
- CSA listed products
- Superior Energy Efficiency Ratios (EERs)
- Commercial Duty Construction with Heavy Gauge Galvanized Steel
- Designed for exact replacement of existing sleeve opening
- P.S.C. Evaporator and Condenser Motors
- High-Efficiency Refrigeration Coils Used to Provide Superior Heat Transfer
- Units Available as Cooling only, Cooling with Natural Gas Heat or L.P. Gas Heat
- Custom Options Available
- Available with State-of-the-Art Digital *Intellitemp*™ Control System
- Available with wired and wireless wall thermostats
- NYC MEA Number 358-93-E VOL.II

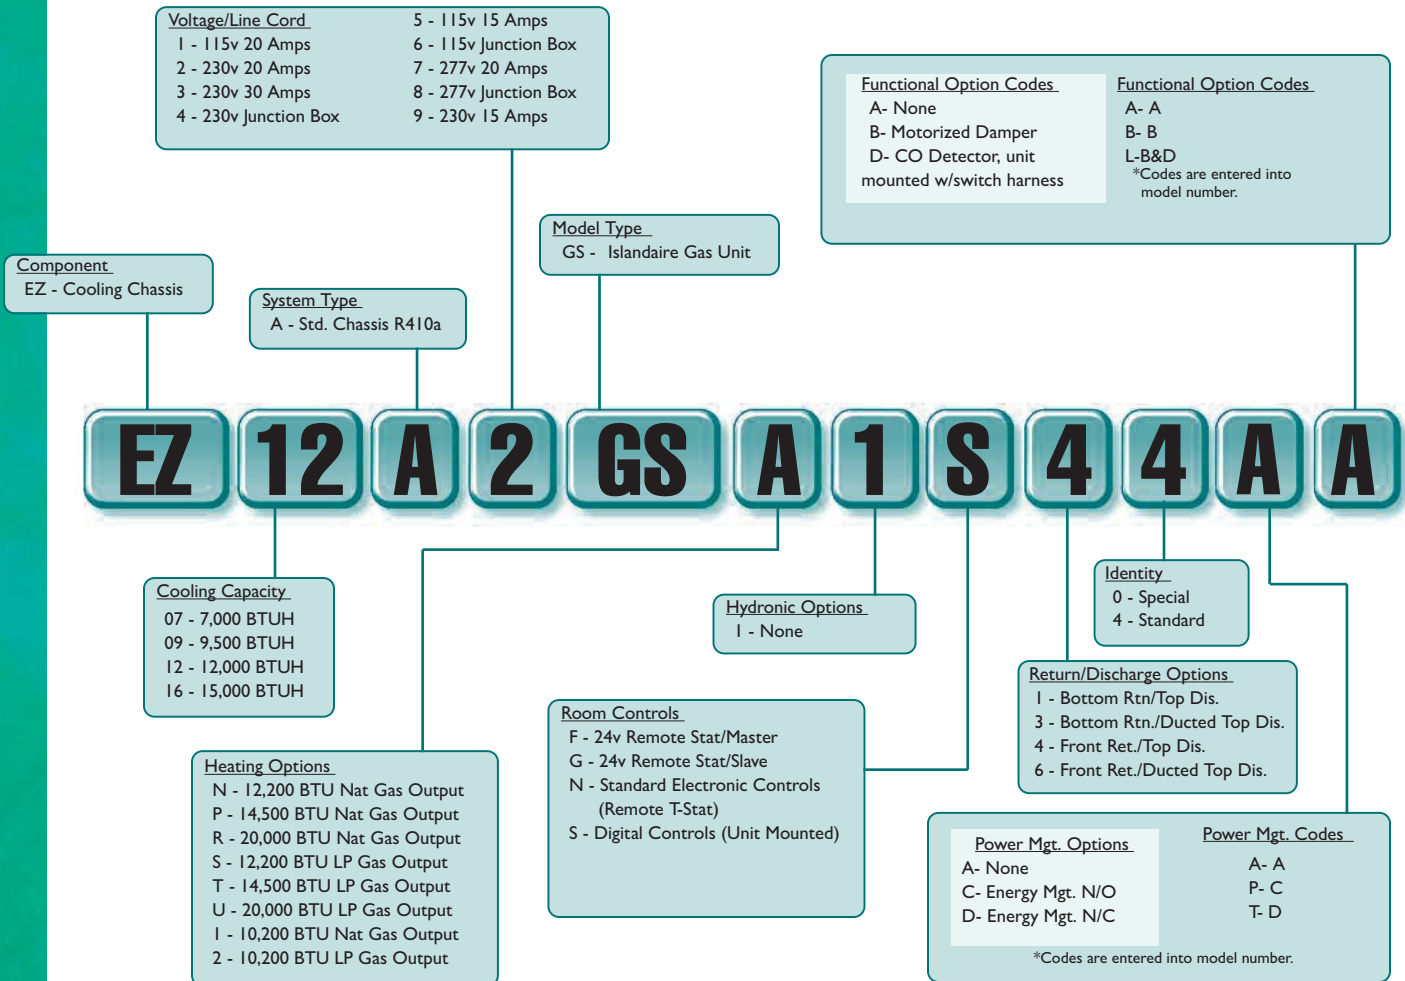

\*Specifications are subject to change due to ongoing product development.



MODELS															
	EZ07				EZ09				EZ12				EZ16		
VOLTS	115	230	208	277	115	230	208	277	115	230	208	277	230	208	277
BTUH COOLING	7,285	7,385	7,185	7,286	8,868	8,968	8,768	8,868	11,936	12,086	11,836	11,936	15,498	15,198	15,345
AMPS COOL	4.51	2.79	2.79	2.19	6.91	3.90	3.90	2.84	9.58	5.00	5.00	3.94	7.10	7.10	5.60
WATTS COOL	607	612	599	607	787	795	782	787	1191	1102	1084	1091	1550	1550	1550
EER	12.00	12.01	11.99	12.00	11.27	11.28	11.21	11.27	10.94	10.97	10.92	10.94	10.00	9.80	9.90
CFM HIGH COOL	360	375	340	360	360	375	340	360	360	375	340	360	360	360	360
CFM LOW COOL/HEAT	260	275	240	260	260	260	240	260	340	340	320	340	340	320	340
NOISE INDOOR/OUTDOOR. (DBA)	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69	45/69
REFRIGERANT (TYPE)	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
SHIPPING WEIGHT (LB)	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180
STC (Unit Off)*	26	26	26	26	26	26	26	26	26	26	26	26	26	26	26

HEATING OPTIONS- Available with any cooling unit																
	I & 2				N & S				P & T				R & U			
INPUT BTUH HEAT	12,000	12,000	12,000	12,000	15,000	15,000	15,000	15,000	20,000	20,000	20,000	20,000	22,500	22,500	22,500	22,500
OUTPUT BTUH HEAT	10,440	10,440	10,440	10,440	13,175	13,175	13,175	13,175	16,800	16,800	16,800	16,800	18,900	18,900	18,900	18,900
VOLTS	115	208	230	277	115	208	230	277	115	208	230	277	115	208	230	277
WATTS HEAT	143	153	166	166	143	153	166	166	143	153	166	166	143	153	166	166
THERMAL EFFICIENCY	87.0	87.0	87.0	87.0	85.0	85.0	85.0	85.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0
AMPS HEAT	1.24	0.72	0.72	0.60	1.24	0.72	0.72	0.60	1.24	0.72	0.72	0.60	1.24	0.72	0.72	0.60

Heating capacities specified in accordance with ARI standard 380-82 at conditions of 47°F WB outdoor and 70°F DB/60°F WB indoor. Wattage, Amperage, COP, EER listings include compressor, evaporator motor and condenser fan motor. Cooling capacities specified in accordance with ARI standard 380-82 at conditions of 95°F DB/75°F WB outdoor and 80°F DB/67°F WB indoor.

Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
115	16		NEMA 5-20R	N/A
208/230	12		NEMA 6-15R	N/A
208/230	16		NEMA 6-20R	N/A
208/230	24		NEMA 6-30R	N/A
277	16		NEMA 7-20R	N/A

