Islandaire
The perfect fit.™

EZ4V SERIES

Thru-the-Wall/Built-In Air Conditioners

Two-stage electric heat for energy savings!!

Highest Efficiency
• In real-world conditions, the modulating inverter chassis means inefficient start/stop of the compressor is eliminated.

R32 Refrigerant



Incredibly Quiet
• Inverter compressor, condensor fan and evaporator fan slow to match cooling and heating demand of room, reducing operating sound levels.
• Elimination of compressor start/stop means the room is much quieter in part-load conditions

Consistent Dehumidification
• Modulating inverter technology ensures a cold condensing evaporator coil in part-load to keep comfortable humidity levels, eliminating clamminess in humid conditions.

The EZ4V Series Inverter Heat Pump incorporates state-of-the-art inverter technology, and it fits into standard 16" x 42" PTAC wall sleeves. The technology is the culmination of years of research to develop a PTAC to clearly lead the market with the low energy consumption and low sound levels. Dramatic energy savings and sound reduction is achieved by modulating the output of the PTAC to match the cooling or heating demands of the room, eliminating costly and noisy compressor cycling. The EZ4V Series units are designed and manufactured for new construction or the replacement of existing Amana, GE, LG, Friedrich, Gree, Trane and all other 42" by 16" PTACs & PTHPs. The product is designed for individually-zoned, comfort-controlled heating and cooling. Standard warranty is a one year parts and labor including five year sealed system part only warranty or a two year parts only including a five year sealed system part only warranty.

FEATURES:

- Dual fan motors
- Quiet and energy-efficient compressor
- Superior temperature control
- Conventional thermostat compatible for heat pump applications
- Modern and elegant appearance
- Washable filter for easy cleaning
- User friendly control panel, remote controller and wall thermostat
- Wi-Fi ready (standard equipment)
- Compressor freeze protection
- Manual fresh air damper
- Random start-up delay after power failure
- Handheld Remote Included
- Room side freeze protection (optional)
- On-board Diagnostics

ACCESSORIES:

- Heavy Duty insulated wall sleeve
- Condensate removal kit
- Architectural louver
- Sub-base kit
- Electrical sub-base kit
- Wired remote thermostat
- Wireless remote thermostat
- I.R. motion sensor
- Door switch
- Duct kit

OPTIONS:

- Up to 55 CFM Continuously Conditioned make up air
- Electric heat add-on for the Dr. PTAC make up air system for cold climates

AHRI CERTIFIED® www.ahridirectory.org
Packaged Terminal HP
AHRI Standard 310/380

System Type
K - Std. Chassis R32
L - Heat Pump R32

Voltage/Line Cord
2 - 208/230v, 20 Amps
3 - 208/230v, 30 Amps
4 - 208/230v, Hard Wire
9 - 208/230v, 15 Amps

Model Type
4V - Inverter Compressor 42 x 16 PTAC

Cooling Capacity
09 - 9,500 BTU
12 - 12,000 BTU
16 - 15,000 BTU

Component
EZ - Cooling Chassis

Return/Discharge Options
1 - Dr. PTAC/VTAC (35 CFM)
2 - Dr. PTAC/VTAC (55 CFM)
3 - Power Vent
4 - None
5 - Motorized Damper

Functional Options
A - None
B - 250W Fresh Air Heater
C - 400W Fresh Air Heater
D - Indoor Freeze Protect

Functional Option Codes*
A - A
B - B
C - C
D - D
L - BD
U - CD
*Codes are entered into model number.

EZ	4V	12	L	2	A	I	S	4	6	A	A

Heating Options
3 - Dual Stage 3.4 kW Elec (2.5 kW / 0.9 kW)
4 - Dual Stage 5.0 kW Elec (3 kW / 2 kW)
A - None Cooling Only

Hydronic Options
1 - None

Room Controls
E - Wireless Thermostat (specify type when ordering)
N - Wall Thermostat Interface, Std. Elect. Cntrls
S - Std. Electronic Controls (Unit Mounted)

Identity Code
0 - Special
6 - Standard

Power Mgt. Options
A - None
C - Energy Mgt. N/O
D - Energy Mgt. N/C

Power Mgt. Codes*
A - A
P - C
T - D
*Codes are entered into model number.

DESIGNED ENGINEERED ASSEMBLED IN THE USA ISLANDAIRE

c ETL LISTED us
Intertek

*Specifications are subject to change due to ongoing product development.

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913

6140629 Rev. A, ECN 10124



EZ4V SERIES


MODELS			
	EZ09	**EZ12**	**EZ16**
VOLTS	208 / 230	208 / 230	208 / 230
AMPS (COOL)	3.80 / 3.50	4.90 / 4.40	6.70 / 6.00
BTUH COOL (STANDARD RATING) (1)	10,000 / 10,000	12,100 / 12,100	14,800 / 14,800
BTUH COOL (EXTENDED RATING)	6,000 - 11,800	9,000 - 15,400	9,000 - 17,000
WATTS COOL	770 / 770	980 / 980	1,340 / 1,340
EER (1) (2)	13.0 / 13.0	12.4 / 12.4	11.1 / 11.1
EER Range	12.7 - 10.3	12.0 - 11.1	12.0 - 10.6
BTUH HEAT (STANDARD RATING) (1)	8,500 / 8,800	11,900 / 11,900	13,700 / 13,700
BTUH HEAT (EXTENDED RATING)	5,606 - 11,475	6,995 - 16,187	6,995 - 16,187
AMPS (HEAT)	3.2 / 2.8	4.6 / 4.1	5.7 / 5.2
WATTS HEAT	640 / 640	960 / 970	1,150 / 1,150
C.O.P. (1) (2)	3.9 / 3.9	3.8 / 3.8	3.5 / 3.5
C.O.P. Range	3.66 - 3.58	3.90 - 3.47	3.70 - 3.55
CFM HIGH COOL	420	450	450
CFM LOW COOL/HEAT	290	360	360
NOISE INDOOR/ OUTDOOR (DBA)	42/50	46/52	46/52
SHIPPING WEIGHT (LB)	105 / 105	107 / 107	107 / 107

Where applicable, cooling capacities are specified at conditions of 95 °F DB/75 °F WB (35 °C DB/24 °C WB) outdoor and 80 °F DB/67 °F WB (27 °C DB/19 °C WB) indoor and heating capacities are specified at conditions of 47 °F DB/43 °F WB (8 °C DB/6 °C WB) outdoor and 70 °F DB/60 °F WB (21 °C DB/16 °C WB) indoor in accordance with AHRI 310/380 and CSA C744 standards. Wattage, Amperage, EER, and COP listings include compressor, evaporator motor and condenser fan motor. The above ratings are a typical heat pump style unit.

Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
208/230	12		NEMA 6-15R	2.0 - 2.5
208/230	16		NEMA 6-20R	3.4
208/230	24		NEMA 6-30R	4.2 - 5.0

Heating Option	Voltage (3)	Wattage	BTU/h	Amps (4)
3	208	2,780	9,500	13.37
	230	3,400	11,600	14.78
	277	3,400	11,600	12.27
4	208	4,090	14,000	19.66
	230	5,000	17,100	21.74
	277	5,000	17,100	18.05

(1) Voltage is Single Phase, Alternating Current and R.M.S.
(2) Amp values are for heater element only.

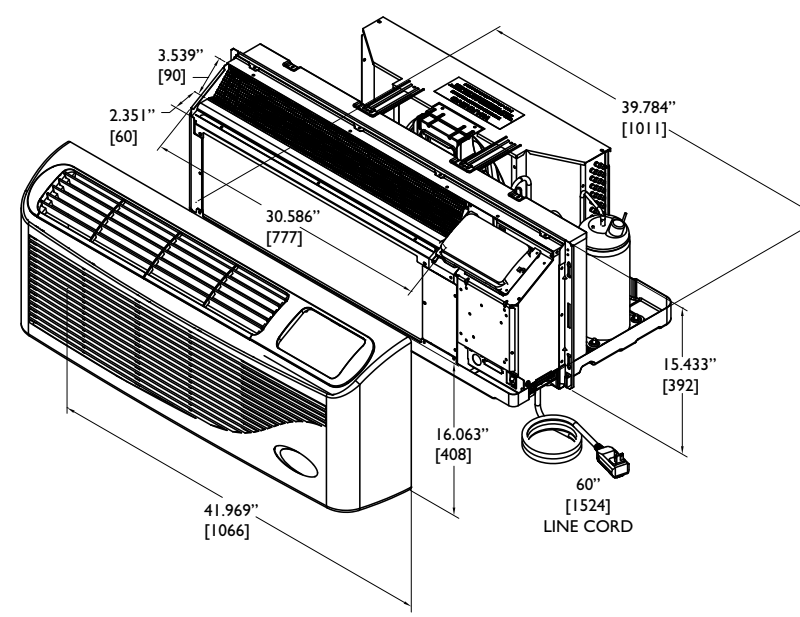

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913

EZ4V SERIES

DR.PTAC Option

PATENTED TECHNOLOGY

The Dr. PTAC option is an add on system to our standard PTAC unit to provide conditioned make up air into a space thru the PTAC unit by providing up to 55 CFM of outdoor air 24/7 by forced fan and cycling dehumidifier compressor based on outdoor relative humidity levels.

Dr. PTAC was created to solve issues with dehumidification in rooms and to introduce fresh air due to deficiencies of oxygen levels. Dr. PTAC is not only a PTAC but a Conditioned Make Up Air unit. New ASHRAE studies show that many illnesses in hotel rooms can be attributed to oxygen-deficient atmospheres. Dr. PTAC solves this issue by introducing tempered conditioned make up air that satisfies both humidity level introduction and supplied oxygen.

Dr. PTAC is a two-stage system. The primary unit is responsible for control of Sensible Heat that is introduced into the room via make up air temperature and thermal load of the occupants. The secondary unit is primarily a dehumidification unit that provides up to 55 CFM of outside fresh air into the room. The correction of the Sensible Temperature comes from the main PTAC unit, which provides additional dehumidification with temperate correction. Overall unit efficiency over standard PTACs is approximately 3% improvement. The compressor/dehumidification process is controlled by a humidistat (factory set at 50% RH), which is monitoring the outdoor relative humidity level and is adjustable by a qualified servicer. When the outdoor humidity level rises above 50% RH, the compressor and dehumidification process starts. Below 50% RH compressor operation and dehumidification is stopped, however, fan operation continues to provide 55 CFM of outdoor air into the space.

The dehumidification system has a temperature switch that monitors both the refrigeration and the outdoor air temperatures. If the outdoor air falls below 38°F the compressor is disabled with fan operation continuing to provide outdoor air into the space. All dehumidifier controls and safeties are automatically reset. An optional air tempering heater is available for the fresh air system for applications where operation in cold winter climates is required. Condensate from the dehumidifier drains into the PTAC drain pan, where it is the also slung onto the condenser coil for re-evaporation outside when the A/C runs. Excess condensate is drained into the wall case, which can either drain to the outside through the louver or is piped to a drainage system via an optional drain kit.

Advantages of the Dr. PTAC System:

1. Lower installation/renovation costs than typical Dedicated Outdoor Air System (DOAS)
2. Decrease inconvenience to customer due to construction/installation of a DOAS* system
3. More humidity control in a room over use of a simple PTAC vent or Power Vent system
4. Allows fresh make up air to travel entirely across sleeping and living area of a room, exiting through a duct or under the door.

Dr. PTAC is designed with heavy duty materials and with a focus on indoor noise reduction, manufactured in accordance to ARI, UL, and AHAM standards and is ETL listed creating the premier PTAC unit of the future.

Problem Solving Benefits of Dr. PTAC:

100% Continuously Conditioned Make up air

Reduced Microbial Growth

Mildew control

Odor reduction

Solves indoor air quality issues

LEED Points Achieved:

1. Energy Efficient Design and compliance with ASHRAE 62.1 and ASHRAE 90.1
2. Indoor Environmental Quality with improved IAQ through make up air.
3. Innovation in Design through the use of a "Make Up Air PTAC".
4. Regional Design through the use of Dr. PTAC in high humidity climates.
5. Diverting Construction Debris through the use of re-usable containers.
6. Recycling/Reusing Dr. PTAC in secondary market where the "first costs" are prohibitive to owners.

DR.PTAC SPECIFICATIONS	
COMPRESSOR (AMPS)	1.02
COMPRESSOR (WATTS)	225
FAN (AMPS)	0.11
DEHUMIDIFICATION @60%RH (LITERS/DAY)	7.9
DEHUMIDIFICATION @82%RH (LITERS/DAY)	17.05
HEATER (WATTS)	250/400
HEATER (AMPS)	1.1/1.7
CONTROL TYPE	Automatic

Dehumidifier Capabilities:

Outdoor % RH	Outdoor Temp (°F)	H2O Removal (L/Day)
60	80	7.9
60	90	7.8
62	84	9.6
70	81	11.18
85	90	14.4
82	82	17.05


500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913

EZ4V SERIES

Unit Accessories

WALL SLEEVES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
Consult Factory	Custom Wall Sleeves available for all building types/wall thicknesses	-	-	-	-
2400405-08	EZ4V Wall Sleeve, Recessed Louver	34.0 lb.	15.00"	42.00"	16.00"
2401135-08	EZ4V Wall Sleeve Assembly, Break Down	33.0 lb.	13.75"	42.00"	16.00"
4090339-08	EZ4V Wall Sleeve Extension Kit	5.0 lb.	2.000"	42.00"	16.00"
4092502	Kit, Acoustic Insulation for Sleeve 2401135-00	1.35 lb.	1.000"	40.375"	13.000"

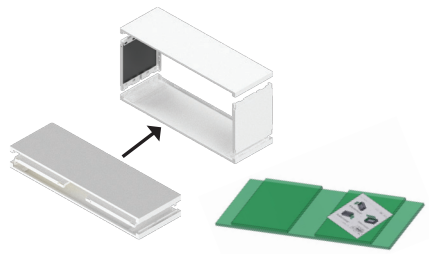


DUCT ASSEMBLIES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
4082401-08	EZ4V Duct Assembly, Standard w/ Plenum	20.0 lb.	N/A	N/A	N/A
4082404-08	EZ4V Duct Extension, 3'	10.0 lb.	N/A	N/A	N/A
6070199	EZ4V Duct End Grille, 6"x 6"	5.0 lb.	N/A	N/A	N/A



LOUVERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6070264	EZ4V Stamped Louver, Formed, Standard (use with 2401135-00 wall sleeve)	5.0 lb.	1.063"	41.00"	15.50"
6070422	EZ4V Architectural Louver, External, Standard (use with 2401135-00 wall sleeve)	7.0 lb.	1.125"	42.00"	15.90"
6070134	EZ4V Louver, Recessed (use with 2400405-00 wall sleeve)	7.0 lb.	1.125"	41.50"	15.50"

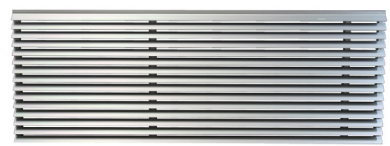


THERMOSTATS

PART NUMBER	DESCRIPTION	APPROX WT.	FEATURES		
			CONNECTION	STAGE	DISPLAY
6041206	Islandaire Non-Programmable, Two Fan Speed	1.0 lb.	Wireless	Single	Horizontal
6041210	Islandaire Programmable ,Two Fan Speed	1.0 lb.	Wireless	Single	Horizontal
6041228	Islandaire Programmable (7 Day/5-1-1 Day/ Non-Programmable), 2-Fan Spd	1.0 lb.	Wired	Single	Horizontal
6041373	Islandaire Wireless, WiFi Programmable	1.0 lb.	Wireless	Single	Horizontal



FILTERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6080162	EZ4V Plastic Filter (2 Pieces), Standard	2.0 lb.	N/A	N/A	N/A



SUBBASES

PART NUMBER	DESCRIPTION	APPROX WT.	FEATURES		
			VOLTAGE	AMPERES	HEIGHT
4083349	EZSB4V03EMR12S00F00V00	14.5 lb.	208/230v	15/20A	3.00"
4083350	EZSB4V03EMR13S00F00V00	15.0 lb.	208/230v	30A	3.00"
4083351	EZSB4V03EMR15S00F00V00	13.0 lb.	265/277v	20A	3.00"
4083352	EZSB4V03BPR00S00F00V00	13.0 lb.	N/A	N/A	3.00"
4083200	EZSB4V04EMR12S00F20V00	13.0 lb.	208/230v	15/20A	4.00"
4084008	EZSB4V05EMR12S00F00V00	13.0 lb.	208/230v	15/20A	5.00"



OTHER OPTIONS

PART NUMBER	DESCRIPTION	APPROX WT.	FEATURES
4090345	EZ4V Louver Hardware Kit #10-32	1.0 lb.	-
4090661	EZ4V External/Internal Drain Kit	1.0 lb.	-
4090970	EZ4V Stamped Louver Hardware Kit	1.0 lb.	-
4091104	EZ4V Air Deflector Kit, Standard	5.0 lb.	-
6041146	EZ4V Hand Held Remote Replacement	1.5 lb.	-
6130198	EZ4V Front Panel (Plastic)	10.0 lb.	-



500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913

Ask your salesman about our DR. PTAC option!*


DR. PTAC
THE CURE FOR UNCONDITIONED MAKE-UP AIR™

*100% conditioned fresh air

EZ Series VH Unit Available

Vertical Water Source Hybrid Heat Pump, Replacement For:

CGC InnKeeper/HomeKeeper



CELEBRATING OUR 30th ANNIVERSARY 1992 - 2022

Islandaire
The perfect fit.™

Scan for more information

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913



Locally Represented By: