



Islandaire EZLT Series is our 42" x 16" new construction model. This unit is specifically designed for low noise transmission, with Outdoor-Indoor Transmission Class (OITC) rating of 28, and a Sound Transmission Class (STC) rating of 37. Our commercial duty construction with heavy gauge galvanized steel and superior components create an efficient reliable unit. The attached Sound Test Report covers all BTU/voltage capacities, controls and air patterns.

FEATURES:

- Whisper Quiet Tangential Wheel
- ETL listed products
- Superior Energy Efficiency Ratios (EERs)
- Commercial Duty Construction with Heavy Gauge Galvanized Steel
- Energy Efficient Rotary Compressors
- Fan Cycle Option Standard
- Indoor Freeze Protection Standard
- Hi Pressure Cutout Standard
- Units Available as Cooling only, Cooling with Electric Heat, Cooling with Hydronic Heat, Cooling with Heat Pump
- Custom Options Available
- Available with wired and wireless wall thermostats

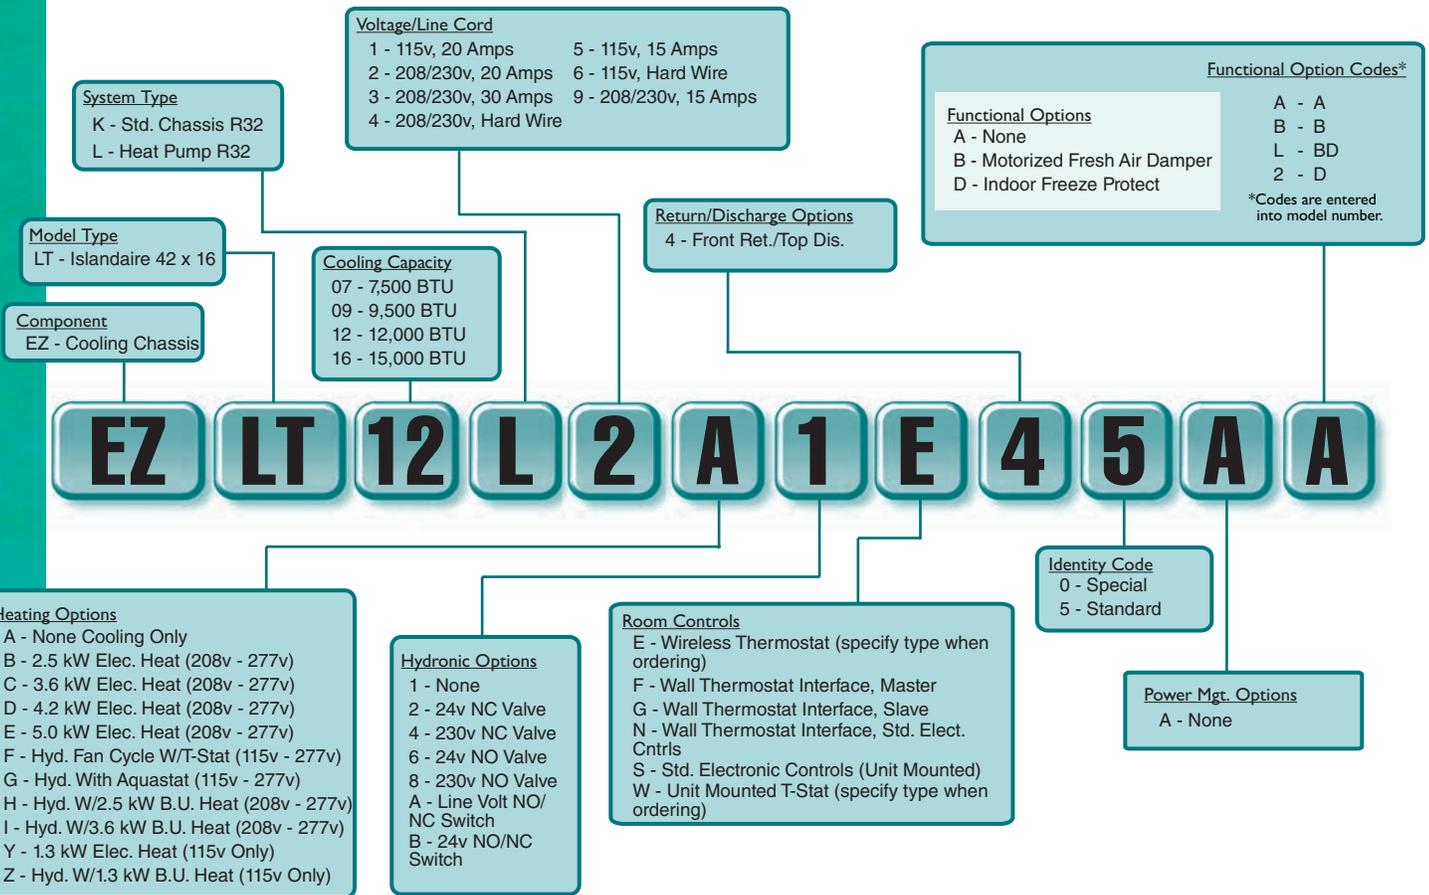

*Specifications are subject to change due to ongoing product development.

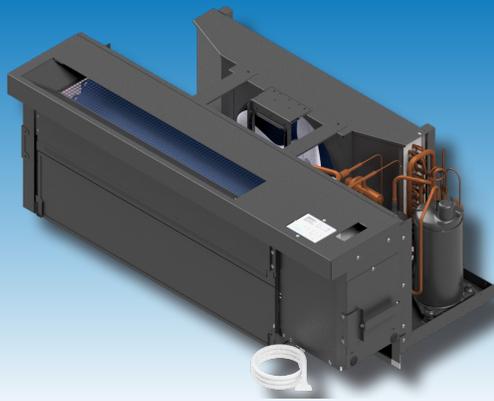


MODELS

	EZ07		EZ09		EZ12		EZ16
VOLTS	115	208/230	115	208/230	115	208/230	208/230
BTUH COOL	8,200	7,300/7,300	9,500	9,000/9,200	12,000	11,900/12,000	15,000/15,000
AMPS COOL	6.7	2.7/2.5	7.1	3.5/3.3	9.0	4.8/4.4	7.1/6.6
WATTS COOL	770	560/570	820	735/750	1,000	990/1,050	1,470/1,510
EER	11.7	13.2/13.0	11.6	12.4/12.4	12.0	11.9/11.8	10.3/10.0
CFM HIGH COOL	350	375/375	370	340/375	400	340/400	430/430
CFM LOW COOL/HEAT	260	240/260	260	240/260	260	240/260	240/260
BTUH HEAT	7,600	6,000/6,000	8,300	7,800/7,900	10,500	10,500/10,700	13,200/13,500
AMPS HEAT	5.9	2.4/2.2	6.5	3.1/2.9	7.8	4.4/4.1	5.9/5.7
WATTS HEAT	675	490/505	750	650/675	900	905/950	1,235/1,310
COP	3.3	3.6/3.5	3.3	3.5/3.4	3.4	3.4/3.3	3.1/3.0

Heating Option	Voltage (V)	Wattage	BTU/h	Amps (2)
B	208	2,045	7,000	9.83
	230	2,500	8,500	10.87
	277	2,500	8,500	9.03
C	208	2,945	10,100	14.16
	230	3,600	12,300	15.65
	277	3,600	12,300	13.00
D	208	3,435	11,700	16.51
	230	4,200	14,300	18.26
	277	4,200	14,300	15.16
E	208	4,090	14,000	19.66
	230	5,000	17,100	21.74
	277	5,000	17,100	18.05
H	208	2,045	7,000	9.83
	230	2,500	8,500	10.87
	277	2,500	8,500	9.03
I	208	2,945	10,000	14.15
	230	3,600	12,300	15.65
	277	3,600	12,300	13.00
Y	115	1,300	4,400	11.30

Where applicable, cooling capacities are specified at conditions of 95 °F DB/75 °F WB (35 °C DB/24 °C WB) outdoor and 80 °F DB/67 °F WB (27 °C DB/19 °C WB) indoor and heating capacities are specified at conditions of 47 °F DB/43 °F WB (8 °C DB/6 °C WB) outdoor and 70 °F DB/60 °F WB (21 °C DB/16 °C WB) indoor in accordance with AHRI 310/380 and CSA C744 standards. Wattage, Amperage, EER, and COP listings include compressor, evaporator motor and condenser fan motor. The above ratings are a typical heat pump style unit.

- (1) Voltage is Single Phase, Alternating Current and R.M.S.
- (2) Amp values are for heating element only.

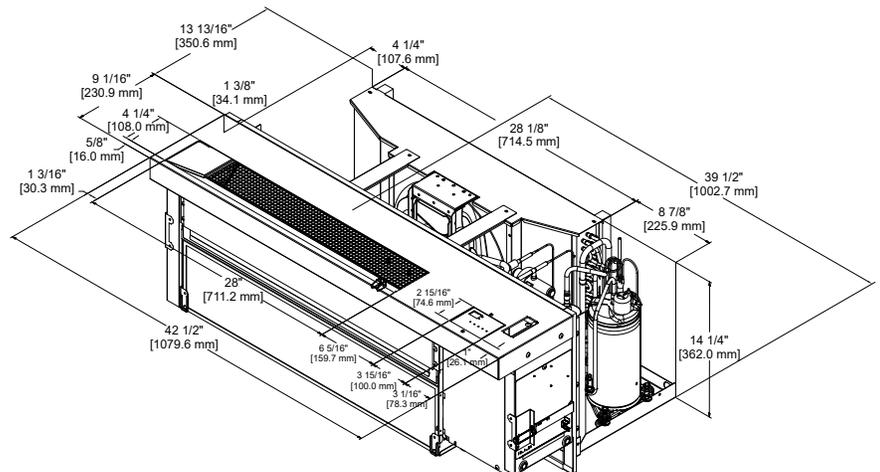


Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
115	12		NEMA 5-15R	1.3
115	16		NEMA 5-20R	1.7
208/230	12		NEMA 6-15R	2.5
208/230	16		NEMA 6-20R	3.4
208/230	24		NEMA 6-30R	4.2 - 5.0

EZLT SERIES

Unit Accessories


ENCLOSURES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
4083882-XX	EZLT Enclosure Assembly, Adj. Height (XX = paint code suffix)	50 lbs.	12.000"	52.000"	24.000" - 27.000"



WALL SLEEVES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
2401101-XX	EZLT Wall Sleeve Assembly, Masonry (XX = paint code suffix)	38 lbs.	15.000"	42.000"	16.000"
2401166-XX	EZLT Wall Sleeve Assembly, Panel Wall (XX = paint code suffix)	38 lbs.	13.750"	42.000"	16.000"



HYDRONIC COILS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6030379	EZLT Hydronic Coil Assembly, Top Mount	10 lbs.	9.250"	43.768"	4.042"
6030381	EZLT Hydronic Coil, Top Mount	6 lbs.	0.866"	27.750"	5.000"



LOUVERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6070422	EZLT Exterior Architectural Louver, Standard	8 lbs.	1.125"	42.000"	16.000"



THERMOSTATS

PART NUMBER	DESCRIPTION	APPROX WT.	FEATURES		
			CONNECTION	STAGE	DISPLAY
6041206	Islandaire Non-Programmable, 2 Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041210	Islandaire Programmable, 2 Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041228	Islandaire Programmable (7 Day/5-1-1 Day/ Non-Programmable), Two Fan Speed	1.0 lbs.	Wired	Single	Horizontal
6041373	Islandaire Wireless, WiFi Programmable	1.0 lbs.	Wireless	Single	Horizontal



FILTERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6080075	EZLT Aluminum Filter, Standard	2 lbs.	0.219"	28.563"	9.063"



Ask your salesman about
our DR. PTAC option!*




*100% conditioned
fresh air

EZ Series VH Unit Available

Vertical Water Source Hybrid Heat
Pump, Replacement For:

CGC InnKeeper/HomeKeeper

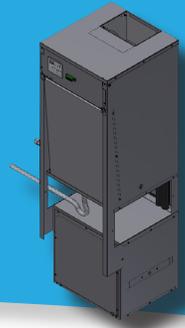

Scan for more information

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913



Locally Represented By: