


**Replacement for Applied Comfort, Carrier 51PH Series Wallmate, McQuay TPW Series, Keeprite Seasonall, Heil Quaker Series C, and Zoneaire CSM & CHP Series**


Islandaire EZ Series CT is a replacement for the Applied Comfort, Carrier 51PH Wallmate Series, McQuay TPW Series, Keeprite Seasonall, Heil Quaker Series C and Zoneaire CSM & CHP units. Our commercial duty construction with heavy gauge galvanized steel and superior components create an efficient, reliable unit. This design eliminates the need for any interior or exterior renovation. Use of the existing wall and louver saves time and money, two very important factors in today's competitive environment! Sloped front panel, motorized vent and fan cycle switch included. If the need does occur where the wall sleeve, duct kit and/or stamped steel or architectural louver needs to be replaced, we manufacture these accessories as well.

## FEATURES

- Proudly Assembled in the U.S.A.
- ETL listed products
- Superior Energy Efficiency Ratios (EERs)
- Commercial Duty Construction with Heavy Gauge Galvanized Steel
- Designed for exact replacement of existing sleeve opening
- Energy Efficient Rotary Compressors
- P.S.C. Evaporator and Condenser Motors
- High-Efficiency Refrigeration Coils Used to Provide Superior Heat Transfer
- Units Available as Cooling only, Cooling with Electric Heat, Cooling with Hydronic Heat, or Heat Pumps
- Custom Options Available
- Available with wired and wireless wall thermostats
- NYC MEA Number 358-93-E Vol. II

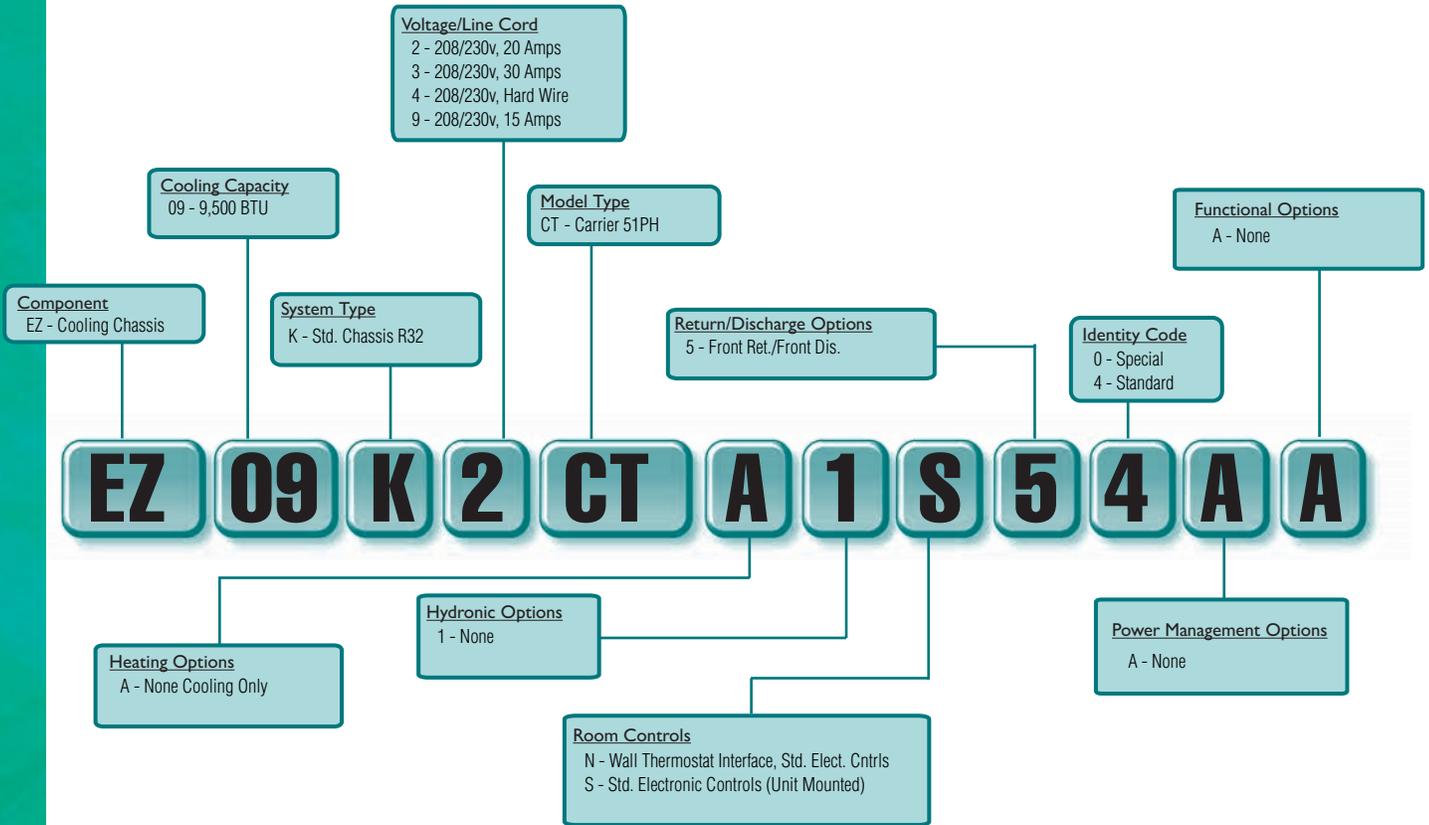


\*Specifications are subject to change due to ongoing product development.

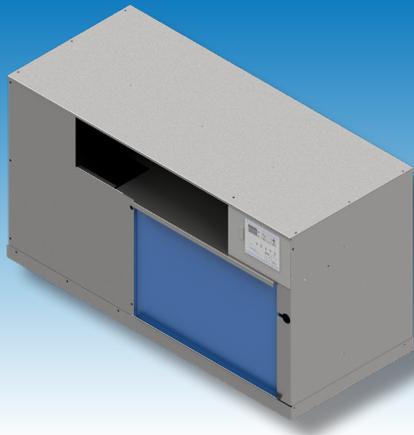

MODELS	
	EZ09
VOLTS	208 / 230
BTUH COOL	9,300 / 9,500
AMPS COOL	4.95 / 4.59
WATTS COOL	1,030 / 1,055
EER	9.0
CFM HIGH COOL	400
CFM LOW COOL	350

\* CFM values are dry coil (not in cooling mode).

Where applicable, cooling capacities are specified at conditions of 95 °F DB/75 °F WB (35 °C DB/24 °C WB) outdoor and 80 °F DB/67 °F WB (27 °C DB/19 °C WB) indoor and heating capacities are specified at conditions of 47 °F DB/43 °F WB (8 °C DB/6 °C WB) outdoor and 70 °F DB/60 °F WB (21 °C DB/16 °C WB) indoor in accordance with AHRI 310/380 and CSA C744 standards. Wattage, Amperage, EER, and COP listings include compressor, evaporator motor and condenser fan motor. The above ratings are a typical heat pump style unit.

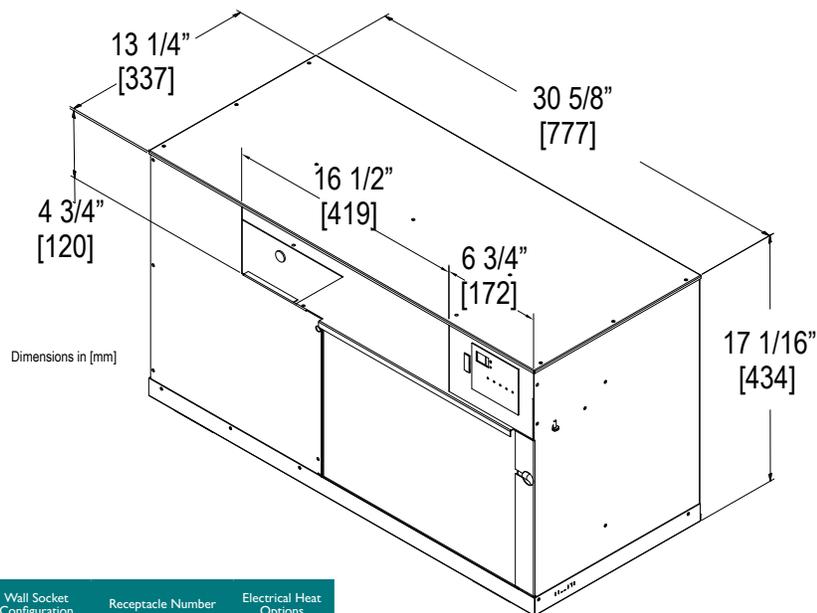

Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
208/230	12		NEMA 6-15R	2.5
208/230	16		NEMA 6-20R	3.6
208/230	24		NEMA 6-30R	4.2 - 5.0


### THERMOSTATS

PART NUMBER	DESCRIPTION	APPROX WT.	FEATURES		
			CONNECTION	STAGE	DISPLAY
6041206	Islandaire Non-Programmable, Two Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041210	Islandaire Programmable ,Two Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041228	Islandaire Programmable (7 Day/5-1-1 Day/ Non-Programmable), Two Fan Speed	1.0 lbs.	Wired	Single	Horizontal
6041373	Islandaire Wireless, WiFi Programmable	1.0 lbs.	Wireless	Single	Horizontal



### FILTERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6080002	EZ Series CT U Trim	2 lbs.	0.250"	24.000"	15.000"

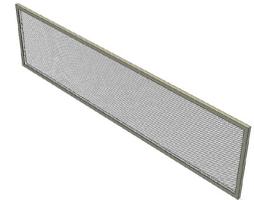

Ask your salesman about  
our DR. PTAC option!\*




\*100% conditioned  
fresh air

## EZ Series VH Unit Available

Vertical Water Source Hybrid Heat  
Pump, Replacement For:

CGC InnKeeper/HomeKeeper

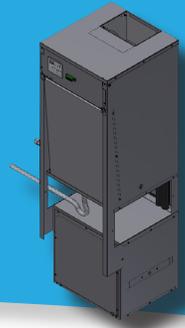

Scan for more information

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759  
e-mail: [sales@islandaire.com](mailto:sales@islandaire.com) • [www.islandaire.com](http://www.islandaire.com)  
Ph: 631-471-2900 • Fax: 631-471-2913



Locally Represented By: